



MOUNTING INSTRUCTIONS

SIDE MOUNTING

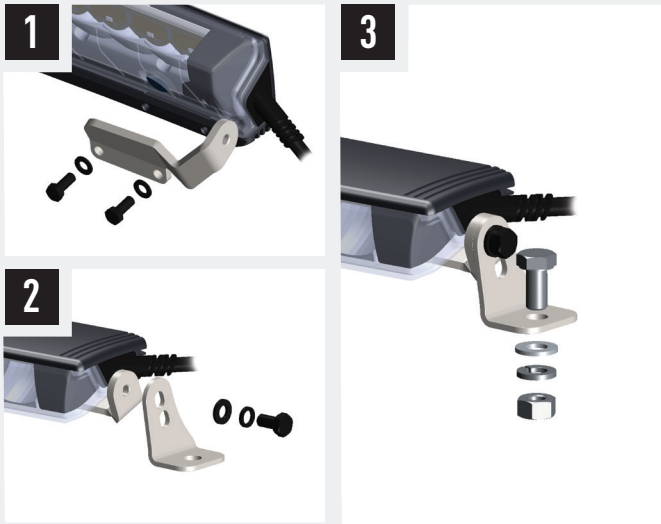

NUMBER PLATE MOUNT

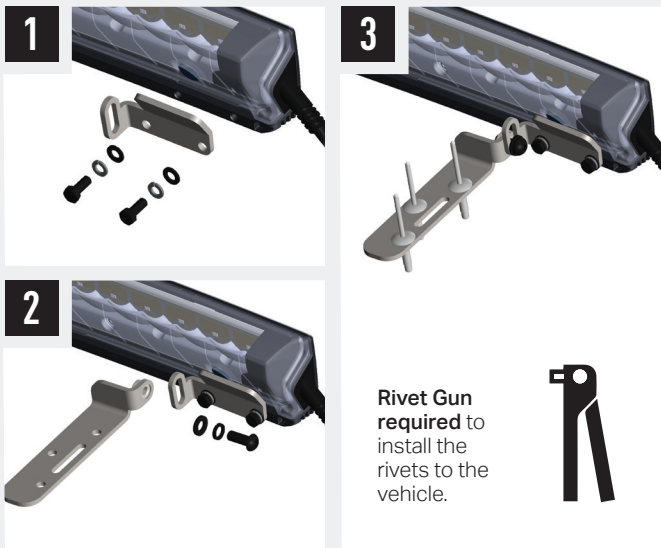

WARRANTY INFORMATION

Your purchase of this Triple-R Lights product is an investment in a product designed and manufactured to the highest standards, but sometimes things can go wrong. You do not need to register your product with us, as we can trace the product through the unique serial number of the lamp.

In the unlikely event of having to make a claim, please retain your purchase receipt and pass it back to the retailer from where you first purchased the product, at the point of raising any issue.

We hope you enjoy your Triple-R Lights product, and wish you many years of a safer, more enjoyable night driving experience.

THANK YOU!

We appreciate your purchase of a Triple-R Lights product, and value your feedback. If you would like to leave feedback on your Triple-R experience, please head to the relevant product page on our website www.triple-r-lights.com.



GLIDE
INSTRUCTIONS



WWW.TRIPLE-R-LIGHTS.COM

+1 520 468 2633
sales@triple-r-lights.com

Triple-R Lights LLC, 600 North Bullard Avenue, Suite 6
Goodyear, Arizona, 85338, USA


 UK BUILT | US DRIVEN    /TRIPLERLIGHTS

ELECTRICAL CONNECTION


IMPORTANT INFORMATION

Please disconnect the vehicle battery before installing or servicing your LED light installation. If in doubt, it is recommended to use the services of a professional installer. It is recommended to use the available corresponding Triple-R wiring kit for your product. If utilizing existing (non Triple-R) wiring, make sure to use the appropriate wire gauge and fusing in line with your lights.

SUPERSEAL (2-PIN) | GLIDE WITHOUT BACKLIGHT

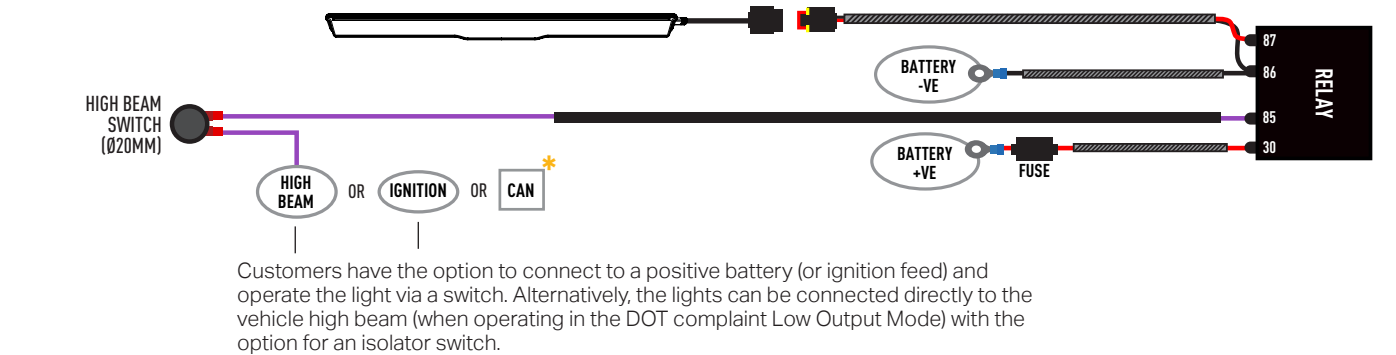


SUPERSEAL (3-PIN) | GLIDE WITH BACKLIGHT

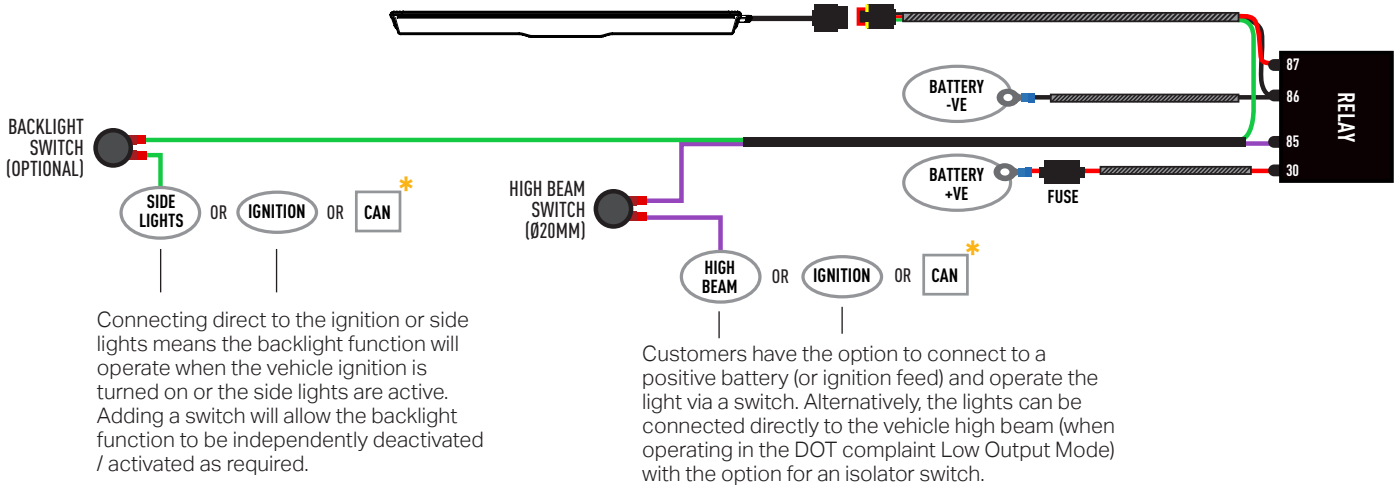

LAMP OPERATING MODES


BOOST MODE

100% light output for off-road use or where local laws and regulations allow.

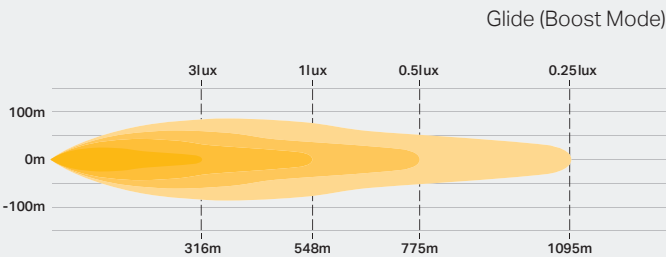

LOW OUTPUT MODE DOT SAE


Reduced output to avoid glare from large reflective objects (e.g. road signs), and/or for operation compliant with DOT/SAE regulations. To activate this mode, with the lights in Boost Mode, flash the light off and on (<0.5secs). To return the light to Boost Mode, repeat the process of flashing the light off and on.

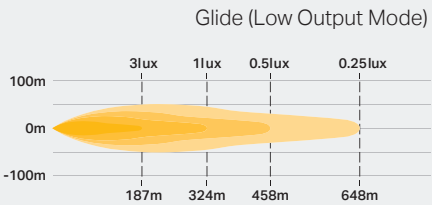

* CAN INTEGRATION

For vehicles where it is not possible to locate a 12V side light / high beam signal, it will be necessary to take those signals from the vehicle's CAN system.

For connection options please visit the Triple-R Lights website, or contact your nearest dealer.

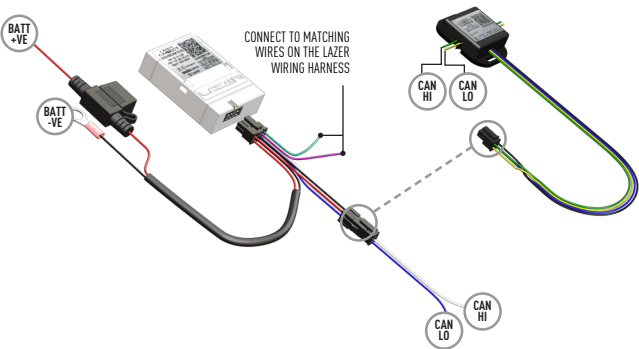

EXAMPLE:
CAN-LZR & CANCCR-LZR (SOLD SEPERATELY)