


ELECTRICAL CONNECTION


Please disconnect the vehicle battery before installing or servicing your LED light installation. If in doubt, it is recommended to use the services of a professional installer. It is recommended to use the available corresponding Triple-R wiring kit for your product. If utilizing existing (non Triple-R) wiring, make sure to use the appropriate wire gauge and fusing in line with your lights.

GLIDE WITHOUT BACKLIGHT

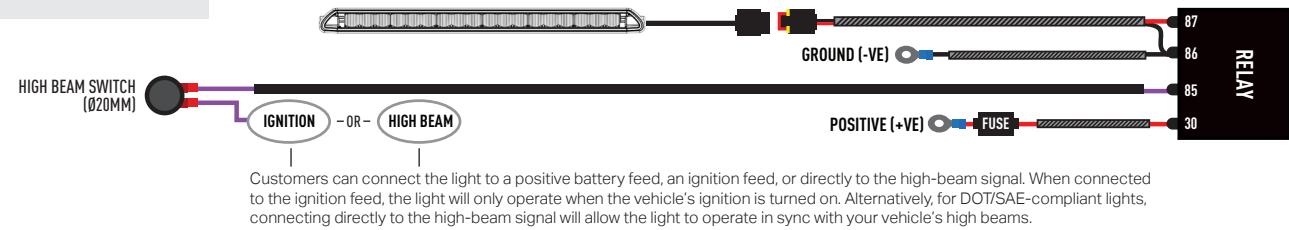

Customers can connect the light to a positive battery feed, an ignition feed, or directly to the high-beam signal. When connected to the ignition feed, the light will only operate when the vehicle's ignition is turned on. Alternatively, for DOT/SAE-compliant lights, connecting directly to the high-beam signal will allow the light to operate in sync with your vehicle's high beams.

LINEAR-18 ELITE / GLIDE WITH BACKLIGHT

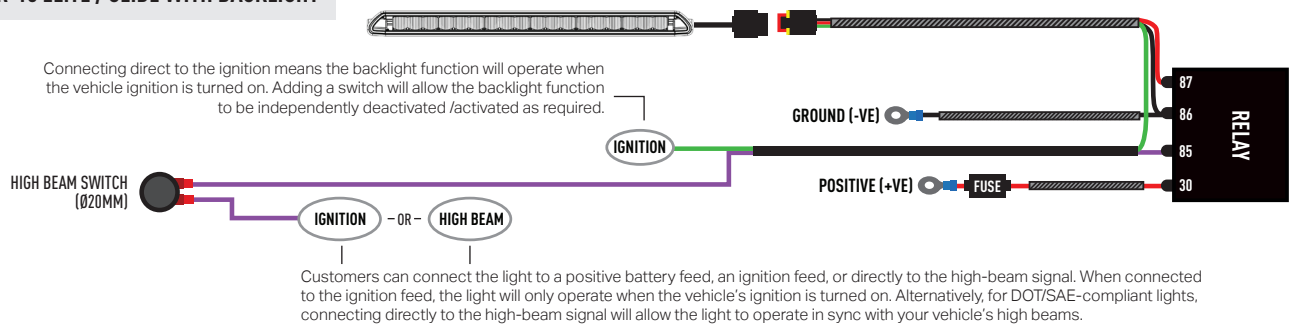

Connecting direct to the ignition means the backlight function will operate when the vehicle ignition is turned on. Adding a switch will allow the backlight function to be independently deactivated /activated as required.

Customers can connect the light to a positive battery feed, an ignition feed, or directly to the high-beam signal. When connected to the ignition feed, the light will only operate when the vehicle's ignition is turned on. Alternatively, for DOT/SAE-compliant lights, connecting directly to the high-beam signal will allow the light to operate in sync with your vehicle's high beams.

LINEAR-18 ELITE+ / LINEAR-18 ELITE I-LBA

Please refer to the instructions that are included with the lamp.



DOT **SAE**

Please visit the lamps' product page on our website at www.triple-r-lights.com to view the DOT / SAE compliance test reports.



RAM 2500/3500 LARAMIE (2019-2024) GRILLE KIT

FITTING INSTRUCTIONS



WWW.TRIPLE-R-LIGHTS.COM

We appreciate your purchase of a Triple-R Lights' product, and value your feedback. If you would like to leave feedback on your Triple-R experience, please head to the relevant product page on our website www.triple-r-lights.com.

technical@triple-r-lights.com


Triple-R Lights LLC, 600 North Bullard Avenue,
Suite 6, Goodyear, AZ 85338
UNITED STATES

UK BUILT | US DRIVEN /TRIPLERLIGHTS

WHAT'S INCLUDED


- 2x Grille Mounting Brackets
 - 2x Cutting Guides
 - Anti-Theft Fasteners & Key
 - Fitting Instructions
- Additionally - Kit Includes:
- 1x Linear-18 / Glide LED Lightbar
 - 1x One-Lamp Wiring Kit

TOOLS REQUIRED

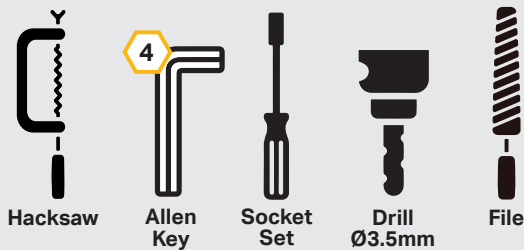

TORQUE VALUES

The code is written on the inside of each bracket (see example).

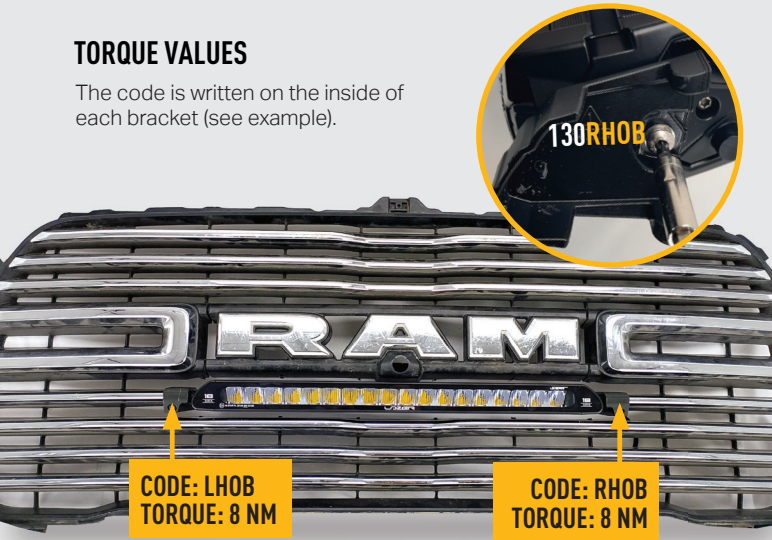

INSTALLATION PROCESS - Linear-18 shown for illustration purposes. Install should be completed with the grille left on the vehicle.

1

2

3

File down any sharp or un-even edges.

4

Torque info see adjacent.

Please use a thread seal compound (i.e. Loctite 222) to protect the lamp fastener from binding over time.

Please see our T&C's for more information.

5

6

Ø3.5mm

7

x2