


ELECTRICAL CONNECTION

LR-750


Customer's have the option to connect to a positive battery or ignition feed. Connecting to the ignition feed, the light will only operate with the ignition turned on.

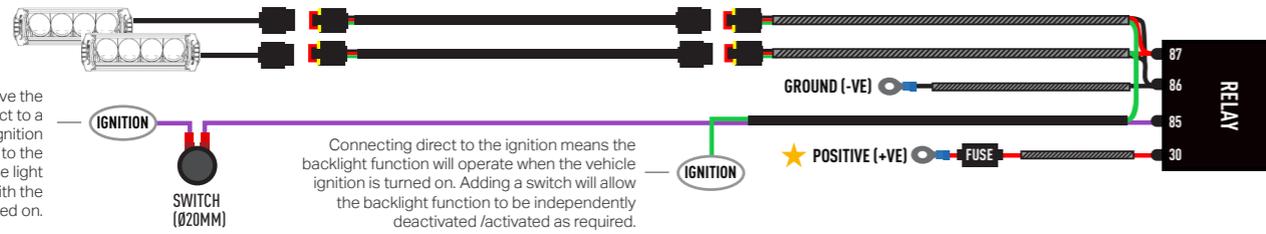

LR-750 ELITE

SWITCH (Ø20MM)

Customer's have the option to connect to a positive battery or ignition feed. Connecting to the ignition feed, the light will only operate with the ignition turned on.

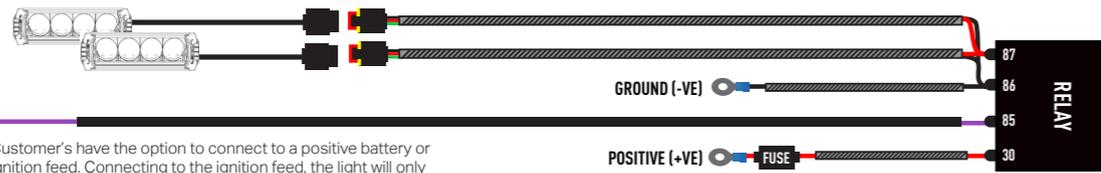

LAMP CONNECTOR INFORMATION


LR BACKLIGHT FUNCTION (OPTIONAL)

BROWN WIRE
AMBER BACKLIGHT

GREEN WIRE
WHITE BACKLIGHT




1




2



3




4



CANBUS INTEGRATION

DOT / SAE COMPLIANT LIGHTS ONLY

Where local laws allow for connecting to the standard high beams on the vehicle, but it is not possible to locate a 12V high beam signal, it will be necessary to take the high beam signal from the vehicle's CAN system. For connection options (sold separately) please visit the Triple-R Lights website, or contact your nearest dealer.

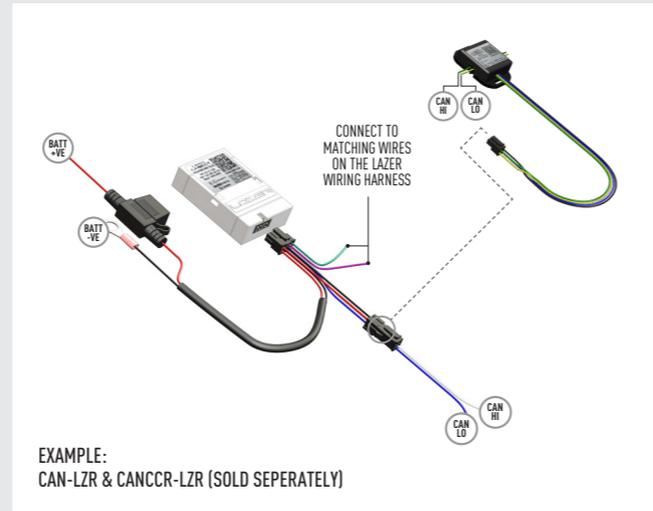

EXAMPLE:
CAN-LZR & CANCCR-LZR (SOLD SEPERATELY)

TRIPLE-R

HIGH PERFORMANCE LIGHTING

A LAZER LAMPS COMPANY

LAND ROVER LR4 (2009-2016) GRILLE KIT

FITTING INSTRUCTIONS



TRIPLE-R

HIGH PERFORMANCE LIGHTING

WWW.TRIPLE-R-LIGHTS.COM

We appreciate your purchase of a Triple-R Lights' product, and value your feedback. If you would like to leave feedback on your Triple-R experience, please head to the relevant product page on our website www.triple-r-lights.com.

sales@triple-r-lights.com

Triple-R Lights LLC, 600 North Bullard Avenue,
Suite 6, Goodyear, AZ 85338
UNITED STATES

UK BUILT | US DRIVEN /TRIPLERLIGHTS


WHAT'S INCLUDED

- 4x Grille Mounting Brackets
- 4x Cutting Guides
- Anti-Theft Fasteners & Key
- Fitting Instructions

Additionally - Kit Includes:


- 2x LR-750 LED Lights
- 1x Two-Lamp Wiring Kit

TOOLS REQUIRED

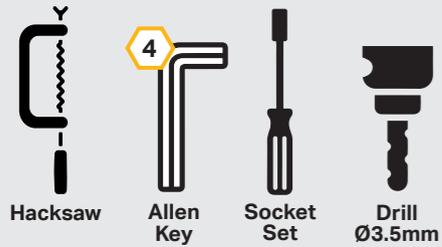

TORQUE VALUES

The code is written on the inside of each bracket (see example).

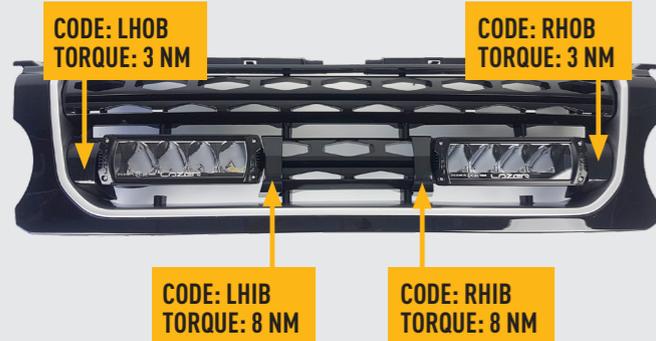

INSTALLATION PROCESS - Discovery 4 (2014+) shown for illustrative purposes. Install should be completed with the grille left on the vehicle.

