

## ALSO AVAILABLE



VEHICLE GRILLE MOUNT KITS



ROOF MOUNTING KITS



MOUNTING KITS



REDED LENSES



NEOPRENE COVERS



AMBER LENSES



CANBUS SYSTEMS


## WHAT'S INCLUDED

- 4x Grille Mounting Brackets
- 4x Cutter Guides
- Anti-Theft Fasteners & Key
- Fitting Instructions

### Additionally - Kit Includes:

- 2x High Performance LED Spotlights (LR-750)
- 1x Two-Lamp Wiring Kit

## TOOLS REQUIRED

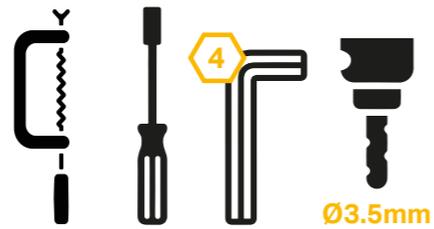

## SIDE MOUNTING INFORMATION

It is advised to use an anti-seize compound or thread-lock when mounting from the side of the lamp(s).

We recommend **Loctite 222**.



# TRIPLE-R

HIGH PERFORMANCE LIGHTING



## LAND ROVER DEFENDER (2020+)

LR-750 GRILLE INTEGRATION KIT

## FITTING INSTRUCTIONS

# TRIPLE-R

HIGH PERFORMANCE LIGHTING

[WWW.TRIPLE-R-LIGHTS.COM](http://WWW.TRIPLE-R-LIGHTS.COM)



sales@triple-r-lights.com

Triple-R Lights LLC, 600 North Bullard Avenue,  
Suite 6, Goodyear, AZ 85338  
UNITED STATES

UK BUILT | US DRIVEN /TRIPLERLIGHTS

# INSTALLATION PROCESS


Install should be completed with the grille left on the vehicle.

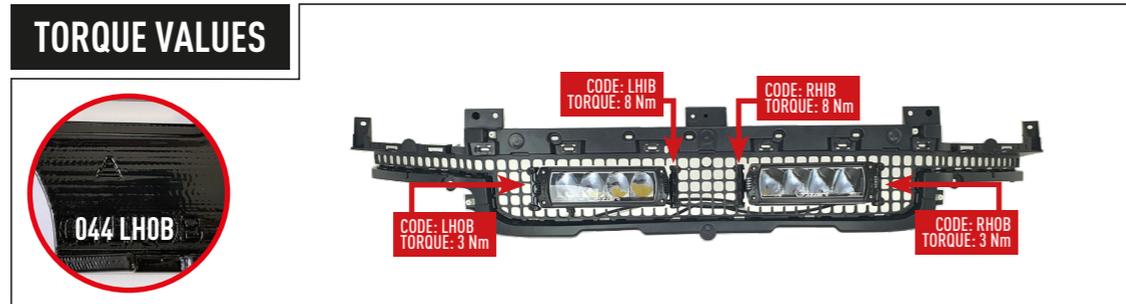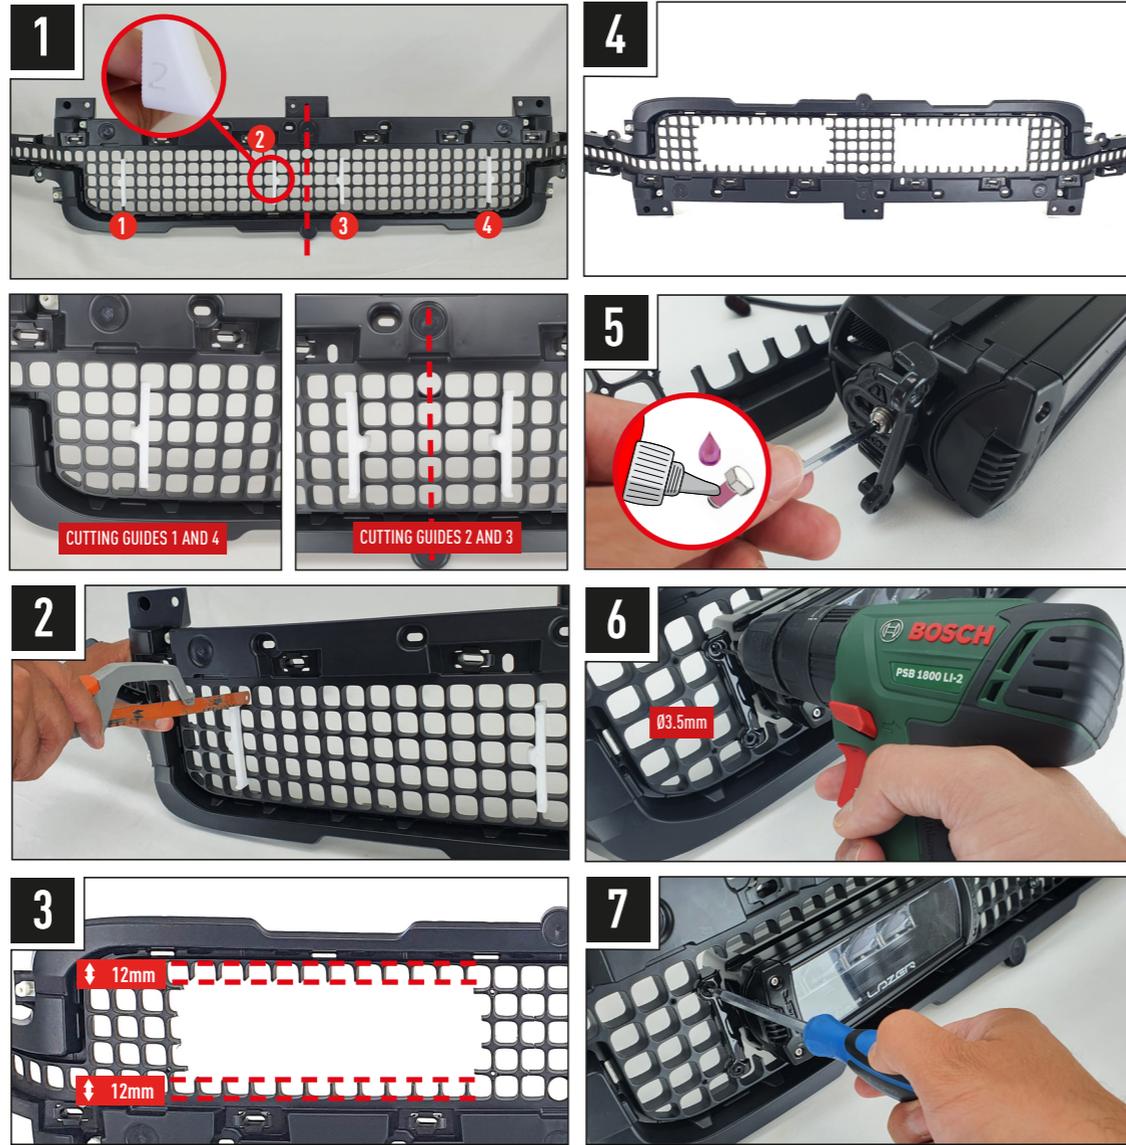

# ELECTRICAL CONNECTION

Please disconnect the vehicle battery before installing or servicing your LED light installation. If in doubt, it is recommended to use the services of a professional installer.


## LR-750

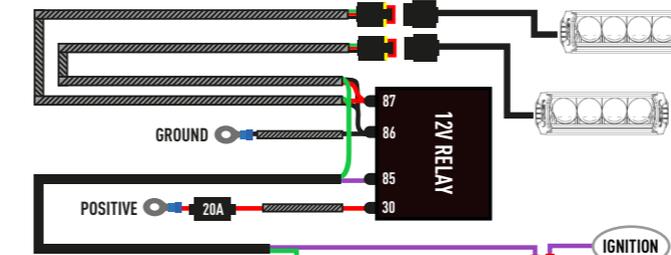

Connecting direct to the ignition means the backlight function will operate when the vehicle ignition is turned on. Adding a switch will allow the backlight function to be independently deactivated/activated as required.

Customer's have the option to connect to a positive battery or ignition feed. Connecting to the ignition feed, the light will only operate with the ignition turned on.

## LR-750 ELITE

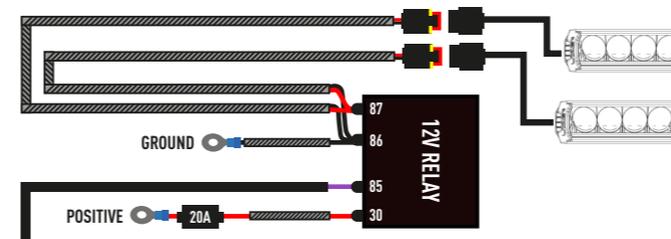

Customer's have the option to connect to a positive battery or ignition feed. Connecting to the ignition feed, the light will only operate with the ignition turned on.

# LR-SERIES - BACKLIGHT FUNCTION

The LR Series (Standard products only) come with the option to connect an amber or yellow backlight. For operation of either, connect the corresponding colored signal wire indicated below.

